
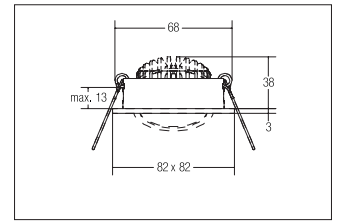



LED-Einbaustrahler, dimmbar  
**Artikel-Nr. 39262023**

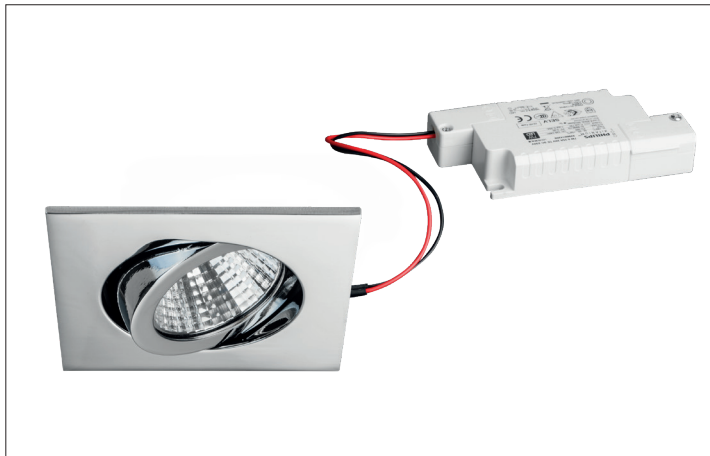

1.0 m	0.7 0.6	1369.2
2.0 m	1.4 1.3	342.3
3.0 m	2.1 1.9	152.1
4.0 m	2.8 2.5	85.6
5.0 m	3.5 3.1	54.8
	Ø (m)	E0(0°) [lx]

LED-Einbaustrahler, dimmbar, chrome, square. In a compact design, for installation in tool-less rapid assembly systems. set incl. driver for 230V. Lamp holder: without, Mounting method: Flush mounting, Place of installation: Ceiling-mounted, material: Aluminium / Plastic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, voltage: 230V AC 50Hz, Power: 7W, amount of light sources / fittings: 1.0 Stk, Luminous flux: 740lm, Farbtemperatur: 2700K, Colour of light: white, Radiation angle: 38°, Adjustability: swivelling, With operating gear, Type of dimming: Phase cut-off, .

<b>Artikel-Nr.</b>	<b>39262023</b>	<b>Applications</b>
<b>price</b>	77.90 €	HOME   LIVING OFFICE   COMMUNICATION HOTEL INDUSTRY
<b>Stand:</b>	19.03.2020 19:29	GASTRONOMY

colour of light	2700 K
Colour	chrome
Radiation angle	38 °
amount of light sources / fit-	1 Qty
material	Aluminium / Plastic
Power	7 W
Lamp type	LED
Colour rendering	CRI > 80
Type of dimming	Phase cut-off
Built-in diameter	68 mm

Built-in depth	38 mm
voltage	230V AC 50Hz
Luminous flux	740 lm
IP protection class	IP20
Protection class	II
Adjustability	swivelling
Energy efficiency class	A++ to A
Width	82 mm
Swivel angle	30 °
circuit type secondary side	parallel conduction