


LED-Anbauprofilleuchte BIRO40, satinierte Abdeckung
Artikel-Nr. 77111263

Licht.
 Für Generationen.

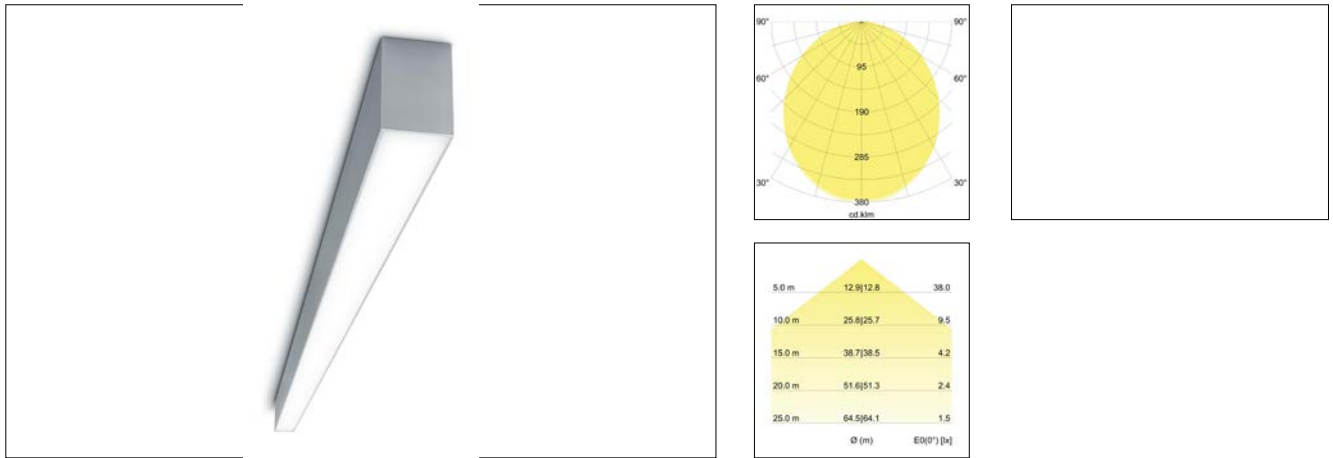

LED-Anbauprofilleuchte BIRO40, satinierte Abdeckung, alu. Surface mounting, Ceiling-mounted. LED-Lichtkanal mit satinierter Abdeckung. Lamp holder: without, Mounting method: Surface mounting, Place of installation: Ceiling-mounted, material: Aluminium / Acrylic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 24,9 W, amount of light sources / fittings: 1.0 Stk, Radiation angle: 80.0 °, Adjustability: not adjustable, With operating gear: Yes, Type of dimming: switchable, Energy efficiency class: A++ to A,

Artikel-Nr.	77111263
price	298.00 €
Stand:	28.08.2019 11:27

colour of light	3000 K
Colour	alu
Radiation angle	80 °
amount of light sources /	1 Qty
material	Aluminium / Acrylic
Power	24,9 W
Lamp type	LED
Colour rendering	CRI > 80
Type of dimming	switchable
voltage	230V AC 50Hz

IP protection class	IP20
Protection class	I
Voltage type	AC
Adjustability	not adjustable
Energy efficiency class	A++ to A
Length	1120 mm
Width	40 mm
Height-depth	60.0 mm
circuit type secondary side	parallel conduction