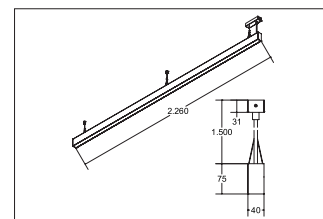
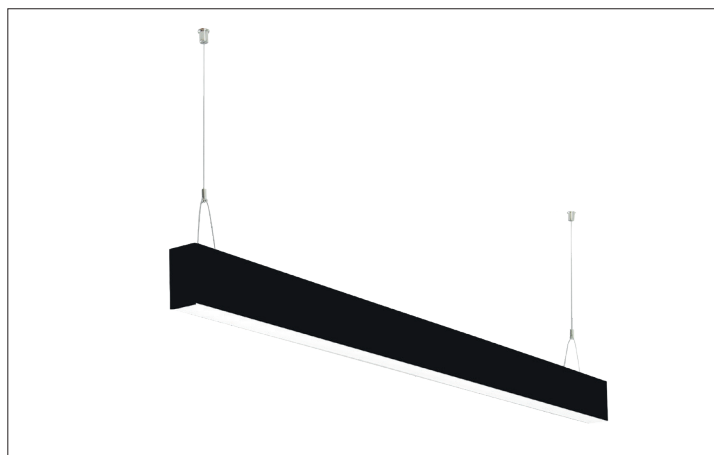


LED-Pendel-Profilleuchte direkt BIRO40

Artikel-Nr. 77244084

LED-Pendel-Profilleuchte direkt BIRO40, schwarz. version: LED, Mounting method: Suspended, Place of installation: Ceiling-mounted, material: Aluminium / Acrylic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 62,7W, Luminous flux: 5.470lm, Colour temperature: 4000K, Colour of light: white, Radiation angle: 80°, Adjustability: not adjustable, With operating gear, .

Artikel-Nr.	77244084
Stand:	25.11.2020 02:08

Type of dimming	DALI
Colour	black
colour of light	4000 K
glare evaluation	UGR < 25
system efficiency	87 lm/W
Luminous flux	5,470 lm
Material cover	satinised
length	2264 mm
Radiation angle	80 °
material	Aluminium / Acrylic

version	LED
Lamp type	LED
voltage	230V AC 50Hz
IP protection class	IP20
Protection class	I
Voltage type	AC
Adjustability	not adjustable
Width	40 mm
Height	75 mm
circuit type secondary side	parallel conduction