
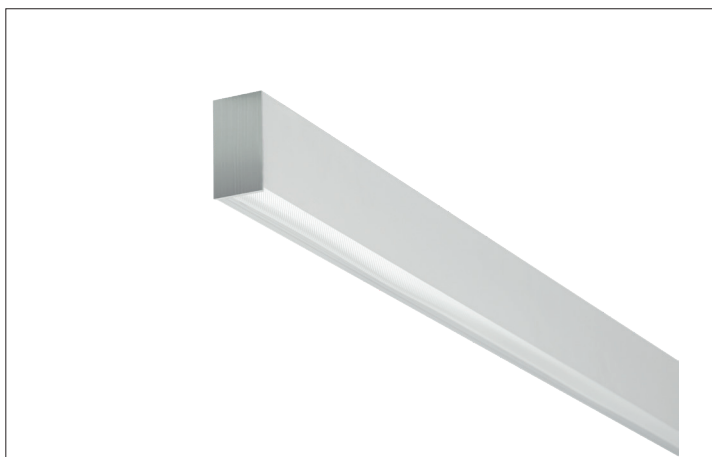


LED-Anbauprofil BIRO40

Artikel-Nr. 77113693

LED-Anbauprofil BIRO40, rectangular. version: LED, Mounting method: Surface mounting, Place of installation: Ceiling-mounted, material: Aluminium / Acrylic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 17,9W, Luminous flux: 1.430lm, Colour temperature: 3000K, Colour of light: white, Radiation angle: 80°, Adjustability: not adjustable, With operating gear, .

Artikel-Nr.	77113693
price	266.00 €
Stand:	09.07.2020 15:25

colour of light	3000 K
Radiation angle	80 °
material	Aluminium / Acrylic
version	LED
Lamp type	LED
voltage	230V AC 50Hz
IP protection class	IP20

Protection class	I
Voltage type	AC
Adjustability	not adjustable
Width	59 mm
Height	75 mm
circuit type secondary side	parallel conduction