





## LED-Einbauprofil BIRO40

**Artikel-Nr. 77023088**

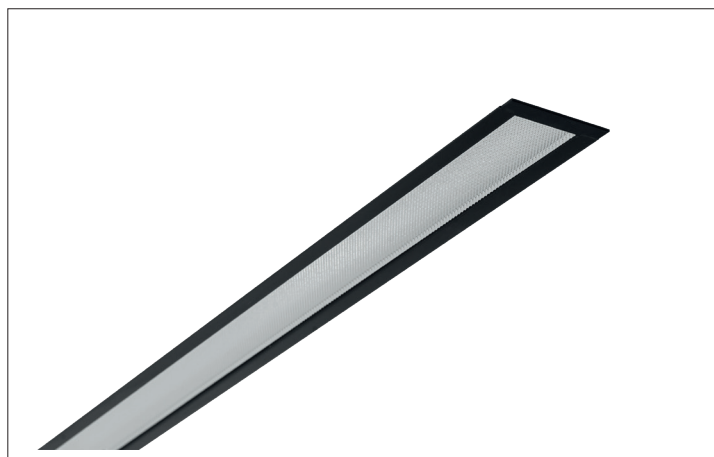

LED-Einbauprofil BIRO40, schwarz, rectangular. LED-Lichtkanal mit microprismatischer Abdeckung. version: LED, Mounting method: Flush mounting, Place of installation: Ceiling-mounted, material: Aluminium / Acrylic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 17,9W, Luminous flux: 1.520lm, Colour temperature: 2700 bis 6500K, Colour of light: white, Radiation angle: 80°, Adjustability: not adjustable, With operating gear, .

<b>Artikel-Nr.</b>	<b>77023088</b>
<b>Stand:</b>	26.11.2020 14:51

Type of dimming	DALI
Colour	black
colour of light	2700 K - 6500 K
glare evaluation	UGR < 19
system efficiency	85 lm/W
Luminous flux	1,520 lm
Material cover	microprismatic
length	1158 mm
Built-in length	1141 mm
Radiation angle	80 °

material	Aluminium / Acrylic
voltage	230V AC 50Hz
Lamp type	LED
IP protection class	IP20
Protection class	I
Voltage type	AC
Adjustability	not adjustable
Width	59 mm
Built-in width	45 mm
Built-in depth	110 mm