
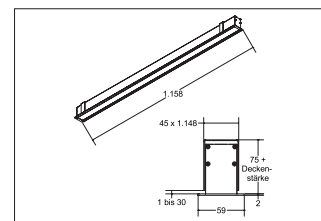



## LED-Einbauprofil BIRO40

**Artikel-Nr. 77033084**

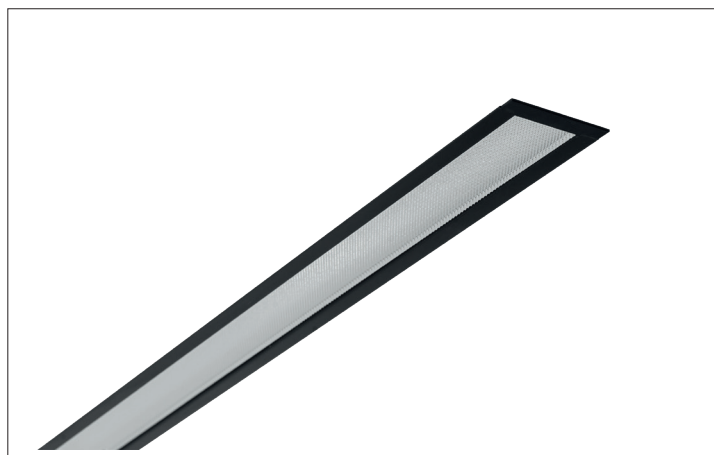

LED-Einbauprofil BIRO40, schwarz, rectangular. LED-Lichtkanal mit satinierter Abdeckung. version: LED, Mounting method: Flush mounting, Place of installation: Ceiling-mounted, material: Aluminium / Acrylic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 31,4W, Luminous flux: 2.740lm, Colour temperature: 4000K, Colour of light: white, Radiation angle: 80°, Adjustability: not adjustable, With operating gear, .

**Artikel-Nr.** 77033084  
**Stand:** 26.11.2020 14:16

Type of dimming	DALI
Colour	black
colour of light	4000 K
glare evaluation	UGR < 25
system efficiency	87 lm/W
Luminous flux	2,740 lm
Material cover	satinised
length	1158 mm
Radiation angle	80 °
material	Aluminium / Acrylic

voltage	230V AC 50Hz
Lamp type	LED
IP protection class	IP20
Protection class	I
Voltage type	AC
Adjustability	not adjustable
Width	59 mm
Built-in width	45 mm
Built-in depth	110 mm