



recessed spot

**Artikel-Nr. 0063.64**

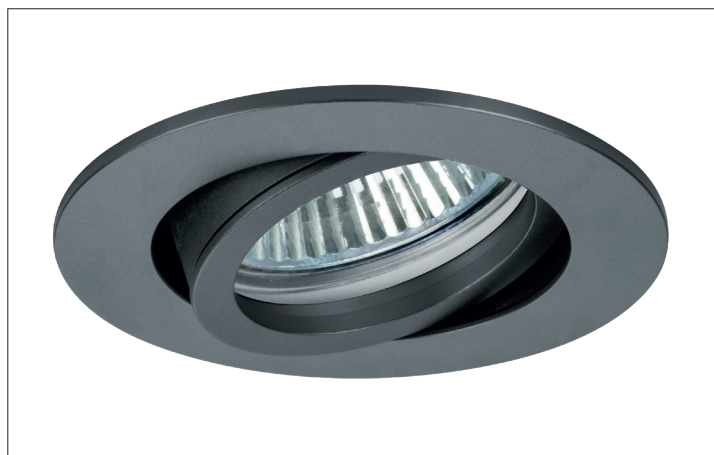

recessed spot, titanium, round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: GX5.3, Mounting method: Flush mounting, Place of installation: Ceiling-mounted, material: Aluminium, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, voltage: 12V, Power: max. 50W, amount of light sources / fittings: 1.0 Stk, Adjustability: swivelling, without operating, Type of dimming: other, .

<b>Artikel-Nr.</b>	<b>0063.64</b>	<b>Applications</b>
<b>price</b>	22.70 €	HOME   LIVING SPA   WELLNESS HOTEL INDUSTRY   GAST- RONOMY
<b>Stand:</b>	20.03.2020 03:26	

Colour	titanium
amount of light sources / fit-	1 Qty
Type of dimming	other
Outer diameter	82 mm
Brackets	5366
Built-in diameter	68 mm
Built-in depth	55 mm
material	Aluminium
Height-depth	3 mm
version	GX5.3

Power	max. 50 W
voltage	12V
Lamp type	LV halogen lamp
circuit type secondary side	parallel conduction
IP protection class	IP20
Protection class	III
Swivel angle	25 °
Voltage type	AC/DC
Circlip	without circlip
Adjustability	swivelling