



LED-Wandeinbauleuchte WALL KIT68, für Gerätedosen
Artikel-Nr. 10156073

Licht.
 Für Generationen.

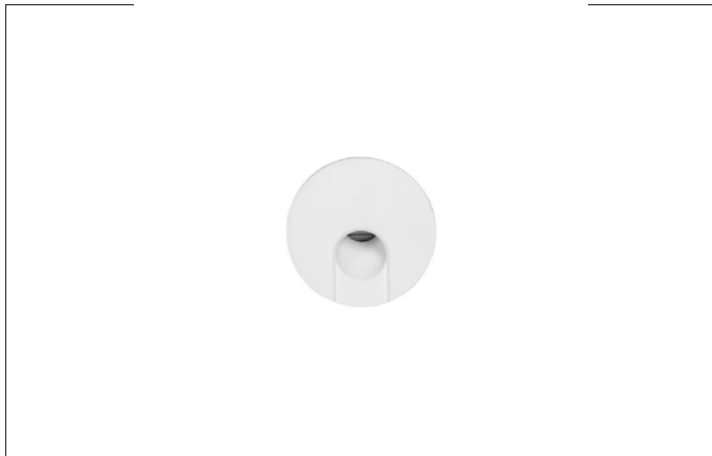

LED-Wandeinbauleuchte für Gerätedosen, white, round. Flush mounting, Wall-mounted. Zur Installation in Hohlwand- oder Betongerätedosen mit einer Einbautiefe von min. 62 mm (Schraubabstand: 60 mm).Kompatibel zu Kaiser-Gerätedosen für Hohlwandinstallation Art.-Nr. 9064-02 bzw. Betoninstallation Art.-Nr. 1556-04.Achtung: Die Lieferung erfolgt OHNE Gerätedose. Mounting method: Flush mounting, Place of installation: Wall-mounted, material: Aluminium / Steel / Plastic, IP protection class: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, voltage: 230V AC 50Hz, Power: 1,5 W, Luminous flux: 130.0 lm, colour of light: 3000 K, Colour of light: white, With operating gear: Yes, Type of dimming: switchable, Energy efficiency class: A++ to A,

Artikel-Nr.	10156073	Applications
price	99.00 €	HOME LIVING OFFICE COMMUNICATION HOTEL INDUSTRY
Stand:	27.08.2019 09:49	GASTRONOMY

Energy efficiency class	A++ to A
colour of light	3000 K
Luminous flux	70 lm
material	Aluminium / Steel / Plastic
Power	1,5 W
Lamp type	LED
Type of dimming	switchable
Built-in diameter	68 mm
Built-in depth	65 mm

voltage	230V AC 50Hz
Luminous flux	70 lm
IP protection class	IP20
Protection class	I
Voltage type	AC
Length	75 mm
Width	75 mm
Height	5.5 mm
dimensions	L x B x H: 75 x 75 x 48mm