



Recessed downlight, IP65, GX5,3

**Artikel-Nr. 2062.02**

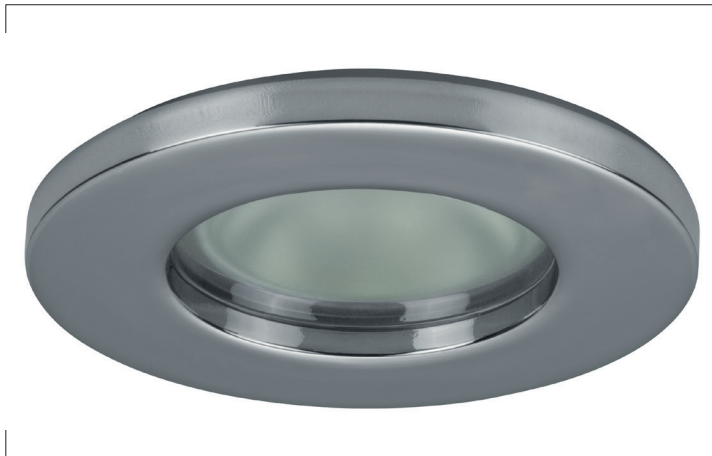

Recessed downlight, IP65, GX5,3, chrome, round. In a compact design, for installation in tool-less rapid assembly systems- Lamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Cast iron / Glass, Degree of protection: according to DIN EN 60529 IP65\*, Protection class: (EN 61140) III, Voltage: 12V, Power: 50W, Amount of light sources / fittings: 1.0 Qty, Adjustability: Not adjustable, With control gear: No, control: Dimming depending on driver.

<b>Artikel-Nr.</b>	<b>2062.02</b>
<b>Stand:</b>	20.07.2021 17:37

Colour	Chrome
Amount of light sources / fittings	1 Qty
control	Dimming depending on driver
Outer diameter	80 mm
Brackets	5366
Built-in diameter	68 mm
Installation depth	80 mm
Material	Cast iron / Glass
Height	5 mm
Lamp holder	GX5.3

Power	max. 50 W
Voltage	12V
Lamp	for LED-retrofill lamp
Circuit type	Parallel conduction
Degree of protection	IP65*
Protection class	III
Voltage type	AC/DC
Circlip	Without circlip
Adjustability	Not adjustable