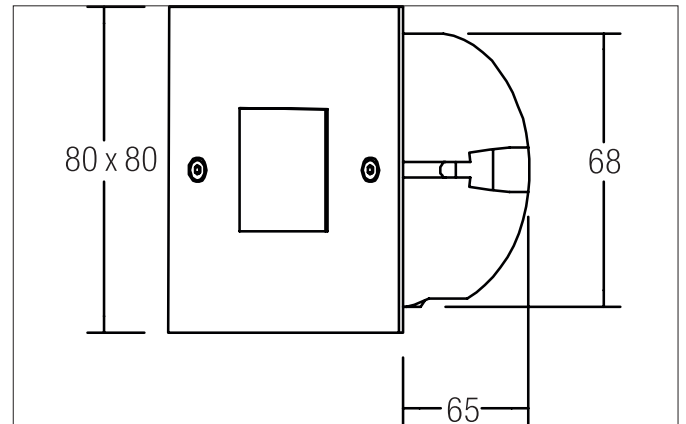


**ECHANI-S LED wall recessed light, IP20**

Article no. P3930W

Light.  
For Generations.**Tender**

LED wall recessed light, IP20, Square. Ceiling cut-out Ø 68 mm, Installation depth 65 mm, Weight 0,124 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 60 lm, Power 1 x 1,2 W, Light colour, Correlated color temprature (CCT) 6.500 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Acrylic / Plastic, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

| Article data       |                                     |
|--------------------|-------------------------------------|
| Article no.        | P3930W                              |
| GTIN               | 4250047733188                       |
| Series name        | ECHANI-S                            |
| Short description  | LED wall recessed light, IP20       |
| Material           | Stainless steel / Acrylic / Plastic |
| Colour             | Stainless steel                     |
| Type of surface    | Matt                                |
| Shape              | Square                              |
| Built-in diameter  | 68 mm                               |
| Installation depth | 65 mm                               |
| Width              | 80 mm                               |
| Hight              | 1.5 mm                              |
| Weight             | 0.124 kg                            |
| Conformance        | CE, UKCA                            |

**ECHANI-S LED wall recessed light, IP20**

Article no. P3930W

Light.  
For Generations.

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 6.500 K   |
| Light colour                 | White     |
| Luminous flux                | 60 lm     |
| System efficiency            | 50 lm/W   |
| Colour rendering             | CRI > 80  |
| Reflector                    | Without   |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 1.2 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Dimmable                              | No   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology   |   |
|-----------------------|---|
| Mounting method       | Recessed mounting                         |
| Place of installation | Wall-mounted                              |
| Adjustability         | Not adjustable                            |
| Further references    | No cover with thermal insulation material |
| Material cover        | Plastic, opal                             |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.151 kg  |
| Length of packaging     | 95 mm   |
| Packaging width         | 75 mm   |
| Packaging height        | 95 mm   |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |