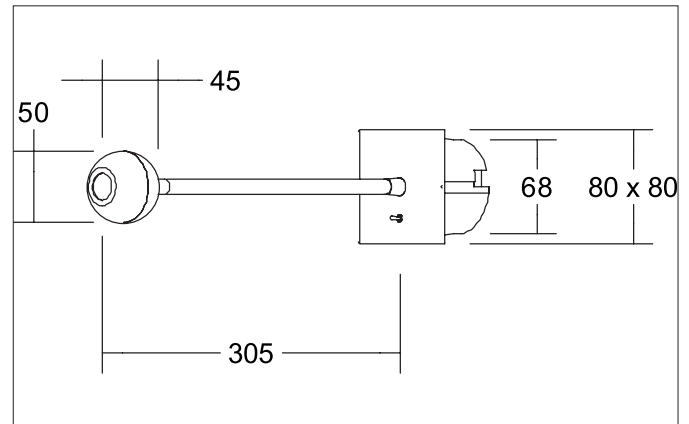


ARCUS LED recessed reading light ARCUS, for device socket, with ball head

Article no. 10181823

Light.
For Generations.**Tender**

LED recessed reading light ARCUS, for device socket, with ball head, Square. Ceiling cut-out \varnothing 68 mm, Installation depth 65 mm, Length 80 mm, Width 80 mm, Weight 0,388 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 320 lm, Power 1 x 4,2 W, System Efficiency 76 lm/W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel, Colour: Black / Chrome, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

| Article data | |
|--------------------|--|
| Article no. | 10181823 |
| GTIN | 4251433932901 |
| Series name | ARCUS |
| Short description | LED recessed reading light ARCUS, for device socket, with ball head |
| Material | Aluminium / Steel |
| Colour | Black / Chrome |
| Shape | Square |
| Built-in diameter | 68 mm |
| Installation depth | 65 mm |
| Length | 80 mm |
| Width | 80 mm |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage, on/off switchable |
| Weight | 0.388 kg |

ARCUS LED recessed reading light ARCUS, for device socket, with ball head

Article no. 10181823

Light.
For Generations.

| Lighting technology | |
|---------------------|------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 320 lm/m |
| System efficiency | 76 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | High-gloss |
| Beam angle | 44° |
| Light sharing | Symmetric |

| Operating technology of the luminaire | |
|---------------------------------------|--------|
| System output | 4.2 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequenz max. | 50 Hz |
| Lamp | LED |
| Protection class | I |
| Degree of protection | IP20 |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | Yes |

| Mounting technology | |
|-----------------------|-------------------|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Head adjustable |
| Material cover | Glass transparent |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.494 kg |
| Length of packaging | 375 mm |
| Packaging width | 86 mm |
| Packaging height | 86 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |