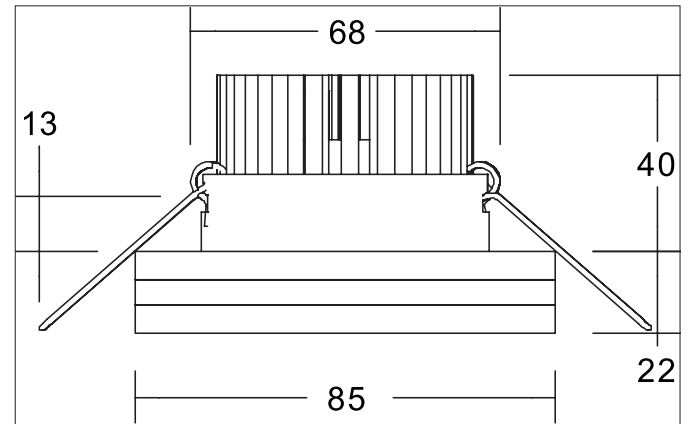


**NARES LED recessed downlight with decorative sidelight, straight outer edge**

Article no. 12357173

Light.  
For Generations.**Tender**

LED recessed downlight with decorative sidelight, straight outer edge, Round. Toolless ceiling installation by installation springs. Ceiling cut-out  $\varnothing$  68 mm, Installation depth 40 mm, Outer diameter 85 mm, Weight 0,203 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass partially frosted cover. Luminous flux 300 lm, Power 1 x 6 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

**Product Benefits**

- Einbaudownlight in runder Bauform aus massivem Aluminium.
- Überraschendes, frisches Design mit Direkt- und Indirektanteilen.
- Deckenausschnitt 68 mm, Außendurchmesser 85 mm, Einbautiefe 40 mm, Lichtstrom 490 lm, IP20.
- Bei Verwendung eines geeigneten Konverters dimmbar.

**NARES LED recessed downlight with decorative sidelight, straight outer edge**

Article no. 12357173

Light.  
For Generations.

| Article data       |   |
|--------------------|---|
| Article no.        | 12357173  |
| GTIN               | 4255752501022   |
| Series name        | NARES   |
| Short description  | LED recessed downlight with decorative sidelight, straight outer edge |
| Material           | Aluminium / Glass / Plastic   |
| Colour             | White   |
| Type of surface    | Structure   |
| Shape              | Round   |
| Outer diameter     | 85 mm   |
| Built-in diameter  | 68 mm   |
| Installation depth | 40 mm   |
| Hight              | 22 mm   |
| Weight             | 0.203 kg  |

| Lighting technology          |                 |
|------------------------------|-----------------|
| Colour temperature           | 3.000 K         |
| Light colour                 | White           |
| Light output                 | Direct/Indirect |
| Luminous flux                | 300 lm          |
| System efficiency            | 50 lm/W         |
| Colour rendering             | CRI > 80        |
| Reflector                    | High-gloss      |
| Beam angle                   | 24°             |
| Light sharing                | Symmetric       |
| Adjustable color temperature | No              |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 6 W  |
| Voltage type                          | DC   |
| Current                               | 350 mA   |
| Lamp                                  | LED  |
| Lamp holder                           | Plug&Play  |
| Protection class                      | III  |
| Degree of protection                  | IP20   |
| Dimmable                              | Depending on type of control gear  |
| Control                               | Depending on driver  |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h   |

| Mounting technology    |   |
|------------------------|---|
| Mounting method        | Recessed mounting                         |
| Place of installation  | Ceiling-mounted                           |
| Adjustability          | Not adjustable                            |
| Max. ceiling thickness | 13 mm                                     |
| stamp                  | UKCA                                      |
| Further references     | No cover with thermal insulation material |
| Material cover         | Glass partially frosted                   |
| Circlip                | Without circlip                           |

**NARES LED recessed downlight with decorative sidelight, straight outer edge**

Article no. 12357173

Light.  
For Generations.

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.27 kg  |
| Length of packaging     | 130 mm   |
| Packaging width         | 100 mm   |
| Packaging height        | 80 mm  |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Accessories |  |
|-------------|--|
|-------------|--|