
BRUMBERG


HYBRIDE LED recessed spot, V4A, IP67

Article no. 12678223

Light. For Generations.





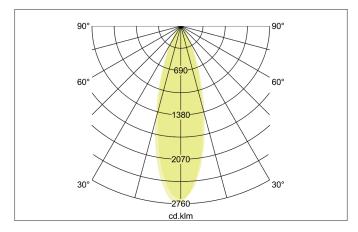



Tende

LED recessed spot, V4A, IP67, Square. Ceiling cut-out L x W 125 x 125 mm, Installation depth 145 mm, Length 135 mm, Width 135 mm, Weight 3,328 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 670 lm, Power 2 x 5,4 W, System Efficiency 124 lm/W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK09 . With electronic driver, on/off switchable.

Article data	
Article no.	12678223
GTIN	4251433916406
Series name	HYBRIDE
Short description	LED recessed spot, V4A, IP67
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Type of surface	Matt
Shape	Square
Built-in width	125 mm
Built-in length	125 mm
Installation depth	145 mm
Length	135 mm
Width	135 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off, 5,000 mm connecting cable and adjustment tool
Weight	3.328 kg

BRUMBERG

HYBRIDE LED recessed spot, V4A, IP67

Article no. 12678223

Light. For Generations.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	670 lm
System efficiency	124 lm/W
Colour rendering	CRI > 80
Reflector	Without
Beam angle	30°
Light sharing	Symmetric

Operating technology of the luminaire	
System output	5.4 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP67
Control	on/off
Bulb change possible	Yes

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Max. ceiling thickness	50 mm
Impact resistance	IK09
Further references	V4A
Material cover	Glass transparent

Packing data	
Gross weight	3.649 kg
Length of packaging	160 mm
Packaging width	160 mm
Packaging hight	175 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.