
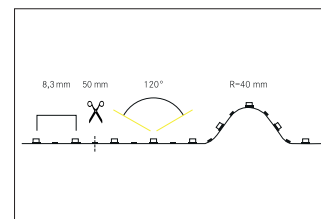


QualityFlex Select flex lighting 5 m, CRI > 90, 28,8 W / m, IP00

**Artikel-Nr. 15206003**

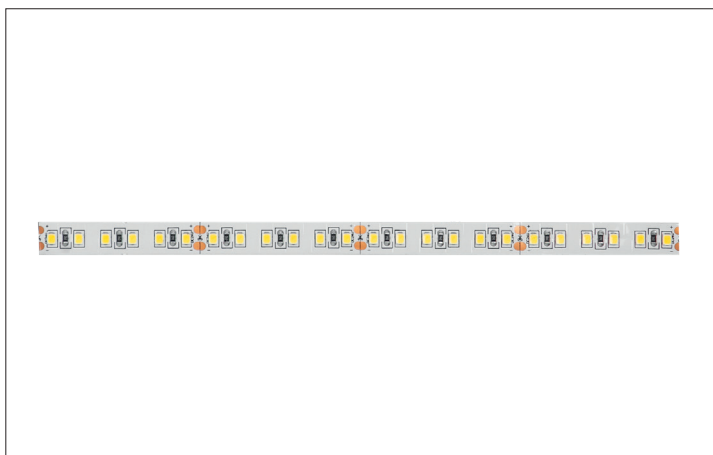

QualityFlex Select flex lighting 5 m, CRI > 90, 28,8 W / m, IP00, white, 3000K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Length: 5000.0 mm Lamp power per meter: 28.8 W/m, Luminous flux per meter: 2480.0 lm/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 120 LEDs per meter, Short Pitch : 8,3mm. The LED flex lighting can be shortened every 50 mm for individual use. The maximum system length of 3.000mm must not be exceeded with one feed. This luminaire contains incorporated and non-exchangeable LED light sources.

**Artikel-Nr.** 15206003  
**Stand:** 23.06.2021 12:40

Energy efficiency class	A+
Colour of light	3000 K
Light colour	White
Luminous flux per meter	2,480 lm/m
Power	144 W
Lamp power per meter	28.8 W/m
Power fix	144 W
Beam angle	120 °
Length	5000 mm
Width	10 mm
Height	1.4 mm
Length of individual sections	50 mm

Degree of protection	IP00
Protection class	III
McAdam-Step	McAdam-Step 5
Short Pitch	8.3 mm
Number of lamps per meter	120 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Circuit type	Parallel conduction
Colour rendering	CRI > 90
Maximum module length	3,000 mm