BRUMBERG
Light. Since 1873.

LED power supply unit 24 V DC, DALI-2 dimmable

Article no. 17250000

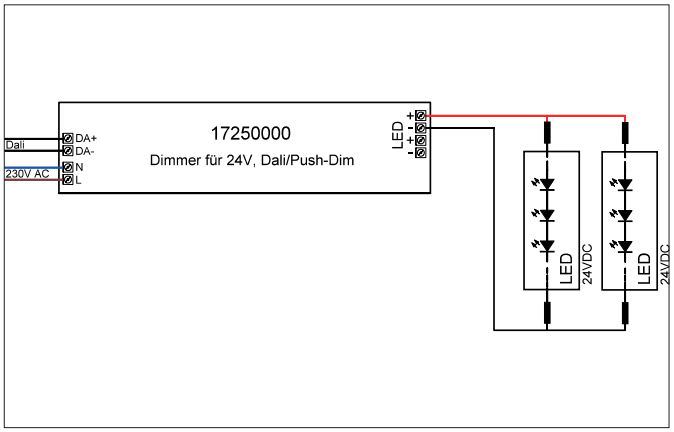

IP20 230V

Tender
LED power supply unit 24 V DC, DALI-2 dimmable, white, Rectangular. Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) II, Voltage: 230V AC, Power: max. 45 W, Dimmable: Yes, Type of dimming: DALI-2.

Product Benefits

- Plastic housing incl. strain relief
- protection class II
- dimmable via DALI-2
- Measuring point Tc (max) 85°C

Article data	
Article no.	17250000
GTIN	4251433957577
Short description	LED power supply unit 24 V DC, DALI-2 dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	187 mm
Width	45 mm
Hight	31 mm
Weight	0.224 kg
stamp	ENEC, EL
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 16.09.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

LED power supply unit 24 V DC, DALI-2 dimmable

Article no. 17250000

Operating technology of driver	
AC nominal voltage min	176 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power min.	1 W
Power max.	45 W
Starting current	40 A, 250 µs
Suitable for emergency lighting	No
Ambient temperature	-20 up to 50 °C
measure point (tc)	85 °C
Version	
Power factor	0.95
max. no. lights on B10 A	13
max. no. lights on B16 A	19
max. no. lights on C16 A	24
max. no. lights on C10 A	16
Output voltage max	24.00 V
Control	DALI-2 , PUSH-Dimm
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	5
Flicker-free	Yes
Average nominal lifespan	44,000 h

Mounting technology	
Further references	No cover with thermal insulation material
Application	Indoor
Suitable for through-wiring	No

Packing data	
Gross weight	0.258 kg
Length of packaging	220 mm
Packaging width	50 mm
Packaging hight	37 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 16.09.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/