BRUMBERG
Light. Since 1873.

# LED converter 350 mA, switchable

Article no. 17665000

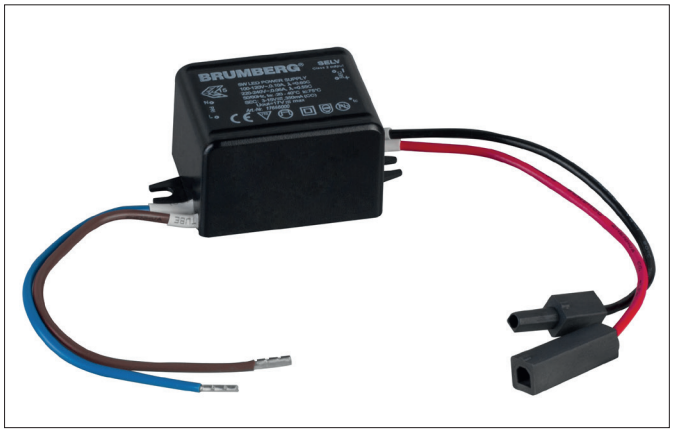


IP20 230V

| Tender |
| --- |
| LED converter 350 mA, switchable, Rectangular. Ceiling cut-out  Installation depth  mm, Length 52 mm, Width 30 mm,  Weight 0,045 kg, with max: 3,2 W , Delivery without bulb.Housing material: Plastic, Colour: black, Permissible ambient temperature (ta): -20 °C up to +50 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire.  on/off switchable. |

| Article data | |
| --- | --- |
| Article no. | 17665000 |
| GTIN | 4255752500476 |
| Short description | LED converter 350 mA, switchable |
| Material | Plastic |
| Colour | black |
| Shape | Rectangular |
| Length | 52 mm |
| Width | 30 mm |
| Hight | 23 mm |
| Scope of delivery | Plug&Play output cable, length 110 mm P&P output cable |
| Weight | 0.045 kg |
| Conformance | CE |

All technical data as well as, weight  and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date  28.07.2026 Orders are placed under our general terms and conditions under  https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

## LED converter 350 mA, switchable

Article no. 17665000

| Operating technology of driver | |
|---|---|
| AC nominal voltage min | 90 V |
| AC nominal voltage max | 264 V |
| Frequency min | 47 Hz |
| Frequency max | 63 Hz |
| Protection class | II |
| Degree of protection | IP20 |
| Power min. | 1 W |
| Power max. | 3.2 W |
| Output_ripple_current | 55 |
| Starting current | 30 A, 60 µs |
| Suitable for emergency lighting | No |
| Ambient temperature | -20 up to 50 °C |
| measure point (tc) | 85 °C |
| Version | Plug&Play |
| Power factor | 0.6 |
| max. no. lights on B10 A | 50 |
| max. no. lights on B16 A | 80 |
| Control | on/off |
| Number of poles | 2 |
| Enviroment temprature (ta) | -20 °C bis +50 °C |
| Measure point (tc) | max. +70 °C |
| Average nominal lifespan | 35,000 h |
| Output current up to | 350 mA |

| Mounting technology | |
|---|---|
| Further references | No cover with thermal insulation material Control gear suitable for installation in false ceiling |
| Application | Indoor |
| Suitable for through-wiring | No |

| Packing data | |
|---|---|
| Gross weight | 0.061 kg |
| Length of packaging | 45 mm |
| Packaging width | 40 mm |
| Packaging hight | 80 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 28.07.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/