
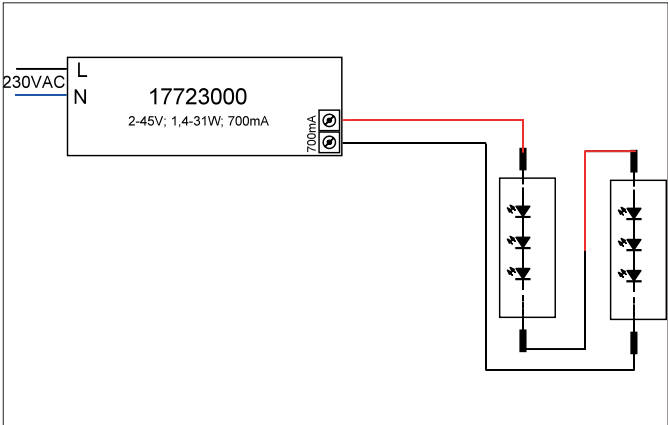


LED converter 700 mA, on/off switchable
Article no. 17723000

Light.
For Generations.

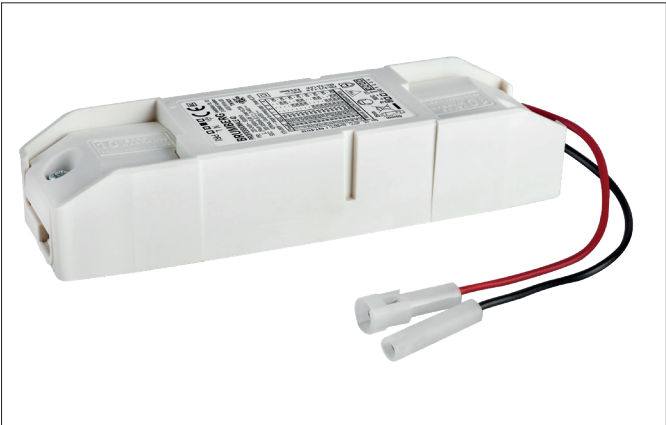

Tender
LED converter 700 mA, on/off switchable, , Rectangular. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz , Power: 31 W, Dimmable: No, Control: on/off.

Article data	
Article no.	17723000
GTIN	4251433924036
Short description	LED converter 700 mA, on/off switchable
Material	Plastic
Shape	Rectangular
Length	146 mm
Width	43.5 mm
Hight	30 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.152 kg

LED converter 700 mA, on/off switchable

Article no. 17723000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Output current	700 mA
Protection class	II
Degree of protection	IP20
max. no. lights on B16 A	50
Starting current	5A 50µs
Power min	1.4 W
Power max.	31 W
Output_ripple_current	3
Suitable for emergency lighting	No
Control	on/off
Environment temperature (ta)	-25 °C up to +40 °C
Measure point (tc)	max. +80 °C
Version	Plug&Play
Power factor	0.95

Packing data	
Gross weight	0.172 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	190 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>