
## BRUMBERG

\***▼** ▼ \*

## LED converter 700mA, ZigBee dimmable

Article no. 17771000

Light. For Generations.

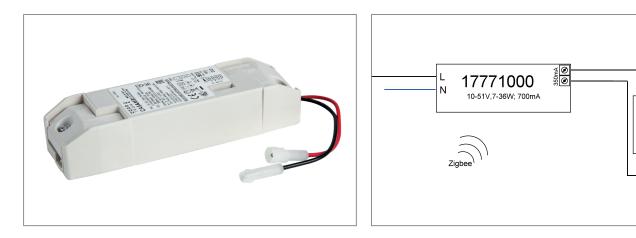



## Tender

LED converter 700mA, ZigBee dimmable, , Rectangular. This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm<sup>2</sup>. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz, Power: 36 W, Dimmable: Yes, Control: ZigBee.

Article data	
Article no.	17771000
GTIN	4251433926658
Short description	LED converter 700mA, ZigBee dimmable
Material	Plastic
Shape	Rectangular
Length	146 mm
Width	44 mm
Hight	30 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.159 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 26.04.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

## LED converter 700mA, ZigBee dimmable

Article no. 17771000

Light. For Generations.

**BRUMBERG** 

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Output current	700 mA
Protection class	1
Degree of protection	IP20
max. no. lights on B16 A	50
Starting current	5A 50µs
Power min	7 W
Power max.	36 W
Output_ripple_current	3
Suitable for emergency lighting	No
Control	ZigBee
Enviroment temprature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +80 °C
Version	Plug&Play
Power factor	0.95

Packing data	
Gross weight	0.177 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging hight	150 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.