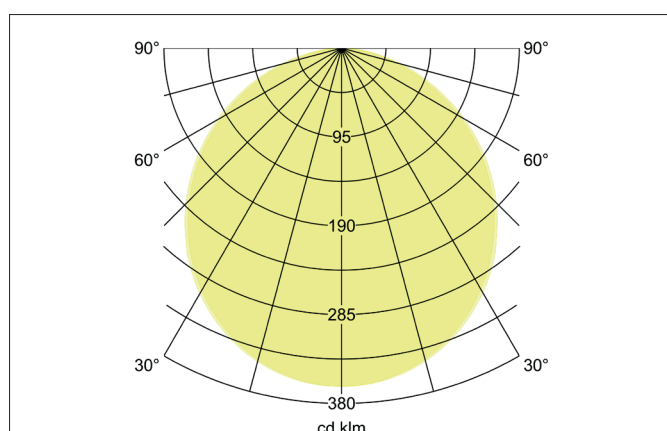
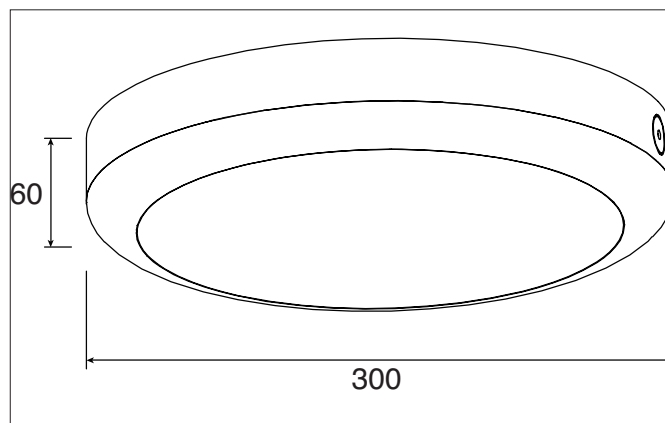


**GAREK LED wall and ceiling surface mounted luminaire, IP65, on/off switchable**

Article no. 32040073

Light.  
For Generations.**Tender**

LED wall and ceiling surface mounted luminaire, IP65, on/off switchable, Round. Luminaire diameter 300.0 mm, Height 60.0 mm Weight 0.84 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 1.200 lm, Power 1 x 15 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Plastic / Acrylic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

**Product Benefits**

- Ceiling or wall surface mounted luminaire made of impact-resistant plastic with a diameter of 300 mm, installation height 60 mm.
- Luminous flux 1,200 lm, IK08, IP65, housing made of PMMA plastic.
- Through various mounting location options the consistent lighting concepts can be realized with one article.

**GAREK LED wall and ceiling surface mounted luminaire, IP65, on/off switchable**

Article no. 32040073

Light.  
For Generations.

Article data	
Article no.	32040073
GTIN	4251433928027
Series name	GAREK
Short description	LED wall and ceiling surface mounted luminaire, IP65, on/off switchable
Material	Plastic / Acrylic
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	300 mm
Hight	60 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	0.840 kg

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	1,200 lm
System efficiency	80 lm/W
Colour rendering	CRI > 80
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	15 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-/Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK08
stamp	UKCA
Material cover	Plastic, opal

Packing data	
Gross weight	1.026 kg
Length of packaging	315 mm
Packaging width	315 mm
Packaging hight	65 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

**GAREK LED wall and ceiling surface mounted luminaire, IP65, on/  
off switchable**

Article no. 32040073

Light.  
For Generations.