## **CELTIS MINI LED surface mounted luminaire 330 mm, with indirect** light component


Article no. 58212782

Light.

For Generations.

**BRUMBERG** 



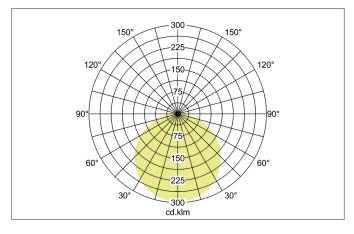



## Tender

LED surface mounted luminaire 330 mm, with indirect light component, shade brown grey, Round.Surface mounting, Ceiling-mountedCeiling luminaire in round design, light emission through mouth-blown, matte opal glass with indirect light component. On/off switchable. Shade material: Chintz. For more available shade variants and special solutions you can download a PDF file for each product online from our website. Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 15 W, Amount of light sources / fittings: 1 Oty, Luminous flux : 1.360 Im, Colour temperature: 3.000 K, Dimmable: No, Control: on/off.

Article data	
Article no.	58212782
GTIN	4251433944096
Series name	CELTIS MINI
Short description	LED surface mounted luminaire 330 mm, with indirect light component
Material	Steel
Colour	White
Shape	Round
Outer diameter	330 mm
Hight	70 mm
Shade colour	Brown gray
Shade material	Chintz
Chintz colour code	66.8003.82
Weight	2.337 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.06.2023 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

## **CELTIS MINI LED surface mounted luminaire 330 mm, with indirect light component** Article no. 58212782

Light. For Generations.

**BRUMBERG** 

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Luminous flux	1,360 lm
System efficiency	91 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Symmetric

Operating technology of the luminaire	
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable

Packing data	
Gross weight	4.255 kg
Length of packaging	400 mm
Packaging width	400 mm
Packaging hight	315 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.