

BRUMBERG

ASTERIA LED ground spike spotlight, 230 V AC, IP65

Article no. 60113183

Light. For Generations.

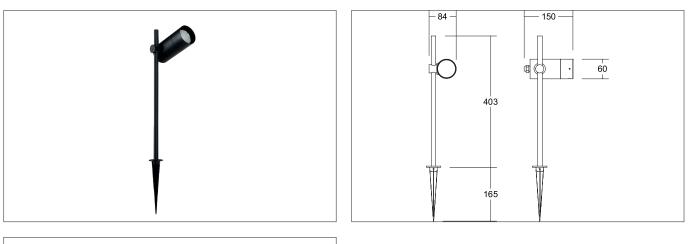



丫 5001m	21°	~ 230V	LDT-Data
------------	-----	-----------	----------

Tender

LED ground spike spotlight, 230 V AC, IP65, Round., Hight 403.0 mm Weight 0.907 kg, optimal light distribution due to a glass transparent cover.Luminous flux 500 lm, Power 1 x 8,5 W, Light colour warm white, Correlated color temprature (CCT) 3.200 K, Colour rendering index CRI > 90, Housing material: Aluminium / Glass, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, .With electronic driver, on/off switchable.

Article data	
Article no.	60113183
GTIN	4251433926177
Series name	ASTERIA
Short description	LED ground spike spotlight, 230 V AC, IP65
Material	Aluminium / Glass
Colour	Black
Type of surface	Structure
Shape	Round
Hight	403 mm
Scope of delivery	Incl. 1500 mm connecting cable and converter for connection to the 230-V mains voltage,
	height-adjustable luminare head
Weight	0.907 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.12.2023 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG

ASTERIA LED ground spike spotlight, 230 V AC, IP65

Article no. 60113183

Light. For Generations.

Lighting technology	
Colour temperature	3.200 K
Light colour	White
Luminous flux	500 lm
System efficiency	59 lm/W
Colour rendering	CRI > 90
Beam angle	21°

Operating technology of the luminaire	
System output	8.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	1
Degree of protection	IP65
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Head adjustable
Swivel angle	90°
stamp	UKCA
Material cover	Glass transparent

Packing data	
Gross weight	1.124 kg
Length of packaging	140 mm
Packaging width	120 mm
Packaging hight	445 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.