BRUMBERG
Light. Since 1873.

LATADY Wall surface-mounted luminaire, for GU10 LED retrofit lamps, IP44

Article no. 65138180

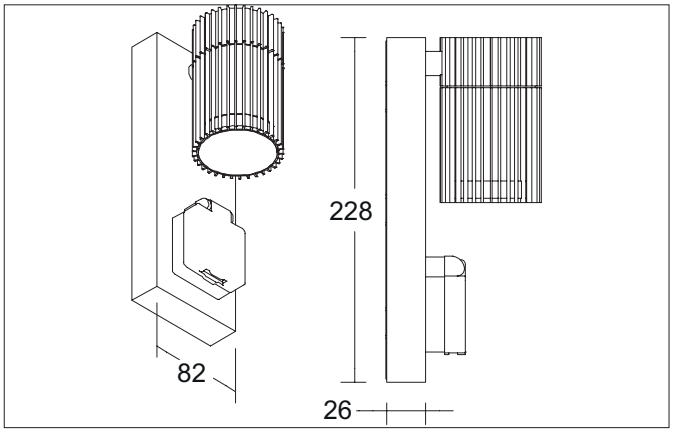

IP44 IK04 230V

Tender
Wall surface-mounted luminaire, for GU10 LED retrofit lamps, IP44, black structure, Other. Compact design for harmonious implementation in well-rounded architectural room concepts. Lamp holder: GU10, Mounting method: Surface mounting, Place of installation: Wall-mounted, Material: Aluminium / Polycarbonate, Degree of protection: (DIN EN 60529) IP44, Protection class: (DIN EN 61140) I, Voltage: 230V AC 50Hz, Power: max. 10 W, Amount of light sources / fittings: 1 piece, Light colour: white, Adjustability: Not adjustable, without control gear, Dimmable: No, Type of dimming: on/off.

Article data	
Article no.	65138180
GTIN	4255752528951
Series name	LATADY
Short description	Wall surface-mounted luminaire, for GU10 LED retrofit lamps, IP44
Material	Aluminium / Polycarbonate
Colour	black structure
Type of surface	Structure
Shape	Other
Length	228 mm
Width	82 mm
Hight	104 mm
Weight	0.526 kg
D licence plate	No
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 06.11.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

LATADY Wall surface-mounted luminaire, for GU10 LED retrofit lamps, IP44

Article no. 65138180

Lighting technology	
Light colour	white
Light output	Direct
Luminaire optics	Cover opal
Reflector	Without
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Lamp power	max. 10 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency min	50 Hz
Frequency max	60 Hz
Lamp	For LED
Lamp holder	GU10
Protection class	I
Degree of protection	IP44
Ambient temperature (ta)	-20°C up to +45°C
Dimmable	No
Number of poles	3
Control	on/off
Bulb change possible	Yes
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Installation depends on the direction	Yes
Adjustability	Not adjustable
Impact resistance	IK04
Mounting type	screw fastening
Mounting information	Article is not suitable for being covered with insulating material.
Areas of application	Outdoor
Cover	Polycarbonat opal
Suitable for through-wiring	No

Packing data	
Gross weight	0.6 kg
Length of packaging	125 mm
Packaging width	103 mm
Packaging hight	240 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 06.11.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/