
# BRUMBERG

### LED converter 350 mA, on/off switchable

Article no. 17662010

#### Light. For Generations.



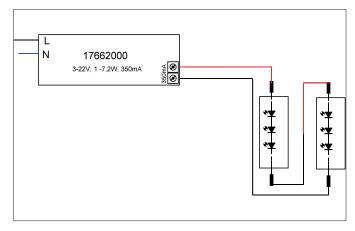



#### Tender

LED converter 350 mA, on/off switchable, , Rectangular.This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm<sup>2</sup>. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 7.2 W, Dimmable: No, Control: on/off.

Article data		
Article no.	17662010	
GTIN	4251433918394	
Short description	LED converter 350 mA, on/off switchable	
Material	Plastic	
Shape	Rectangular	
Length	68 mm	
Width	35 mm	
Hight	21 mm	
Scope of delivery	Plug&Play version with 110 mm P&P output cable	
Weight	0.033 kg	

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 22.04.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

## LED converter 350 mA, on/off switchable

Article no. 17662010

Light. For Generations.

**BRUMBERG** 

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Output current	350 mA
Protection class	
Degree of protection	IP20
Starting current	10 A (max.10ms)
Power min	1 W
Power max.	7.2 W
Output_ripple_current	50
Suitable for emergency lighting	No
Control	on/off
Flicker-free	Yes
Enviroment temprature (ta)	-20°C up to +50°C
Measure point (tc)	max. +75 °C
Average nominal lifespan	35000 h
Version	without
Power factor	0.4

Packing data	
Gross weight	0.049 kg
Length of packaging	45 mm
Packaging width	40 mm
Packaging hight	80 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.